

AFi50xx

16"/40 cm
Blower/Exhauster

The large, air driven AFi50xx ventilator is stackable in storage or during operation. It exhausts the air outside of the duct, not in airstream. The AFi50xx hazardous location blower/exhauster also provides protection and peace of mind to the user.

Specifications

Model	AFi50xx
Part	AA7000
IMPA Code	591512, 591426
Motor	GAST 4AM-NRV-50C
Motor Type	Totally Encapsulated Air Flame Proof
Noise	89 dB @ 3' (1 m)
Run Time	Continuous
Weight	43 lbs/ 20 kg
Dimensions (h/w/d)	19 x 21 x 16 in / 48 x 53 x 41 cm
Duct Adapters	2




AIR CONSUMPTION AND HORSEPOWER REQUIREMENTS FOR AIR COMPRESSOR*

Air Pressure (PSIG) Inlet Air	80
Air Consumption	40 scfm / 68 m³/hr
Compressor Hp	6.4 Hp
Approval	CE

* Values are shown for single-stage piston-type air compressors operating at 85% efficiency, and working on intake air under standard conditions.

«Certifications & Approvals»

Ex II 2 GD c T4+1° C < Ta < +40° C

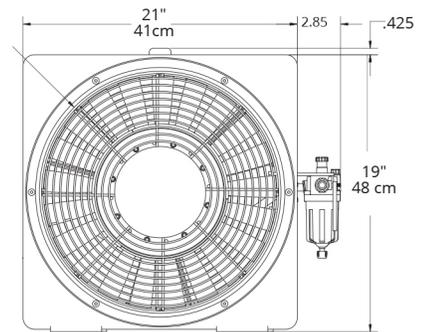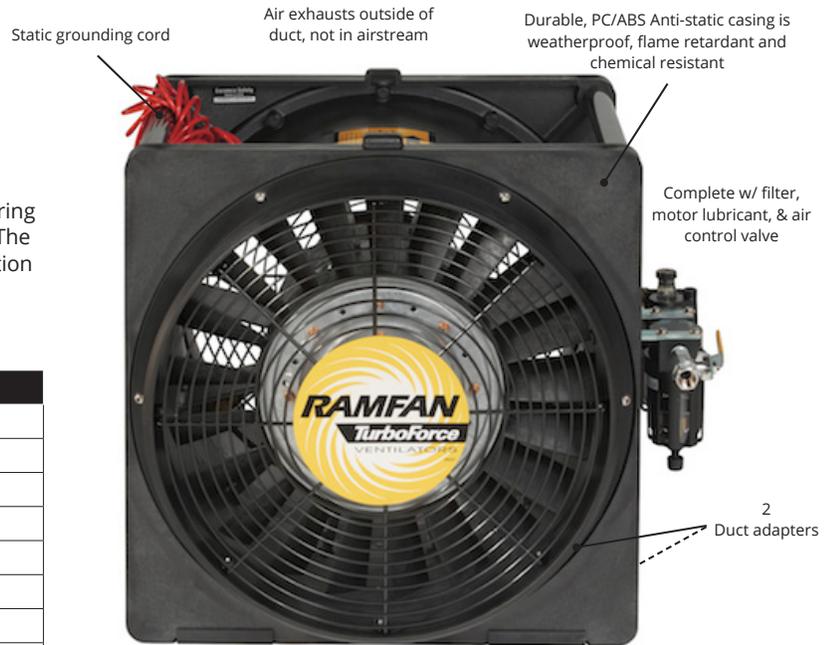

Performance

Airflow	
Free Air	3,200 cfm (5,440 m³/hr) (measurement @ 80psig inlet air)

Available Accessories

ECKO Flex™ Anti-Static Duct with carrying bag

Order # FDT-1615CBR - 16" (40cm) anti-static duct 15' (4.6 m), w/ carrying bag

Order # FDT-1625CBR - 16" (40cm) anti-static duct 25' (7.6 m), w/ carrying bag

