
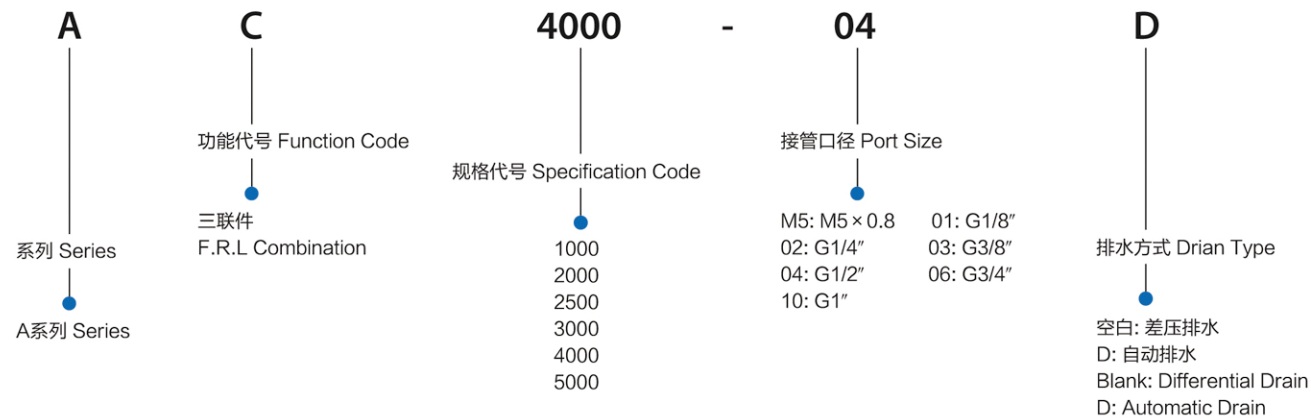


PAC1000~5000系列空气过滤组合（三联件）
PAC1000~5000 Series Air Filter Combination (F.R.L Combination)


AC2000-02

AC3000-03

AC4000-04D

订购码 Ordering Code**规格 Specification**


型号 Model		AC1000 -M5	AC2000 -01	AC2000 -02	AC2500 -02	AC2500 -03	AC3000 -02	AC3000 -03	AC4000 -03	AC4000 -04	AC4000 -06	AC5000 -06	AC5000 -10
额定流量/Rated Flow		90	500	500	1500	1500	2000	2000	4000	4000	4500	5000	5000
接管口径/Port Size		M5	G1/8"	G1/4"	G1/4"	G3/8"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
过滤精度/Filter Precision		25 μm											
最高使用压力 Highest Working Pressure		1.0MPa											
保证耐压力 Ensured Pressure Resistance		1.5MPa											
使用温度范围 Operating Temp. Range		5~60℃											
调节压力范围 Range of Adjustable Pressure		0.05~ 0.7MPa	0.05~0.85MPa										
建议用油 Recommended Oil Use		ISO VG 32											
容器材料/Container Material		聚碳酸酯 Polycarbonate											
防护罩/Protective Cover		无 Not Available			有 Available								
放水器功能/Drain Function		差压放水 Differential Drain	差压放水、自动放水 Differential Drain, Automatic Drain										
阀型/Valve Type		带溢流型 With Overflow											
构成元件 Composing Elements	过滤器 Filter	AF1000-M5	AF2000-01	AF2000-02	AF3000-02	AF3000-03	AF3000-02	AF3000-03	AF4000-03	AF4000-04	AF4000-06	AF5000-06	AF5000-10
	调压阀 Regulator	AR1000-M5	AR2000-01	AR2000-02	AR2500-02	AR2500-03	AR3000-02	AR3000-03	AR4000-03	AR4000-04	AR4000-06	AR5000-06	AR5000-10
	油雾器 Lubricator	AL1000-M5	AL2000-01	AL2000-02	AL3000-02	AL3000-03	AL3000-02	AL3000-03	AL4000-03	AL4000-04	AL4000-06	AL5000-06	AL5000-10

PAC1010~5010系列空气过滤组合（二联件）
PAC1010~5010 Series Air Filter Combination (FR.L Combination)

AC2010-02


AC3010-03

AC5010-10

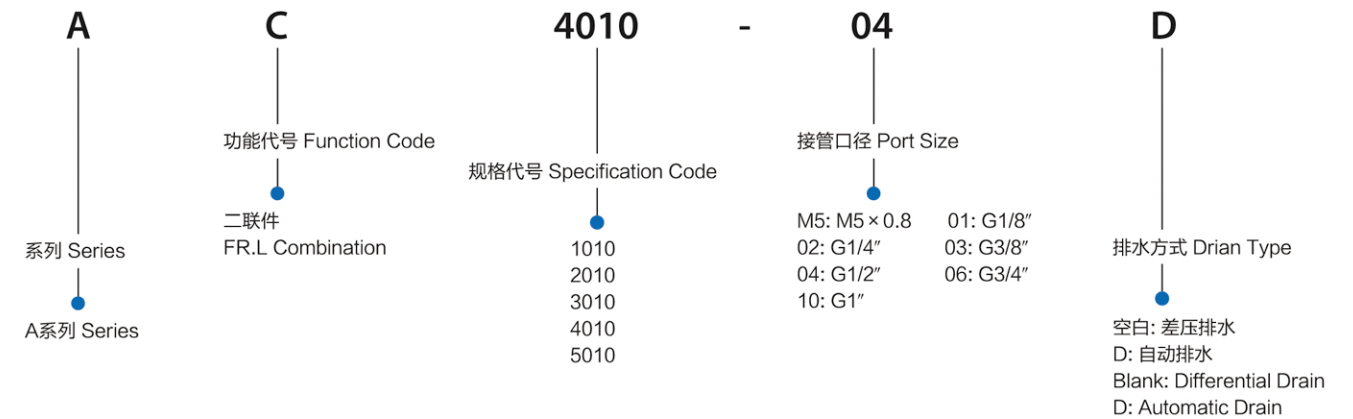订购码 Ordering Code**规格 Specification**

型号 Model		AC1010 -M5	AC2010 -01	AC2010 -02	AC3010 -02	AC3010 -03	AC4010 -03	AC4010 -04	AC4010 -06	AC5010 -06	AC5010 -10
额定流量/Rated Flow		90	500	500	1700	1700	3 000	3000	3000	4000	4000
接管口径/Port Size		M5	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
过滤精度/Filter Precision		25 μm									
最高使用压力 Highest Working Pressure		1.0MPa									
保证耐压力 Ensured Pressure Resistance		1.5MPa									
使用温度范围 Operating Temperature Range		5 ~ 60℃									
调节压力范围 Range of Adjustable Pressure		0.05 ~ 0.7MPa	0.05 ~ 0.85MPa								
建议用油 Recommended Oil Use		ISO VG 32									
容器材料/Container Material		聚碳酸脂 Polycarbonate									
防护罩/Protective Cover		无 Not Available			有 Available						
放水器功能/Drain Function		差压放水 Differential Drain	差压放水、自动放水 Differential Drain, Automatic Drain								
阀型/Valve Type		带溢流型 With Overflow									
构成元件 Composing Elements	过滤调压阀 Filter & Regulator	AW1000-M5	AW2000-01	AW2000-02	AW3000-02	AW3000-03	AW4000-03	AW4000-04	AW4000-06	AW5000-06	AW5000-10
	油雾器 Lubricator	AL1000-M5	AL2000-01	AL2000-02	AL3000-02	AL3000-03	AL4000-03	AL4000-04	AL4000-06	AL5000-06	AL5000-10

外形尺寸 Overall Dimension

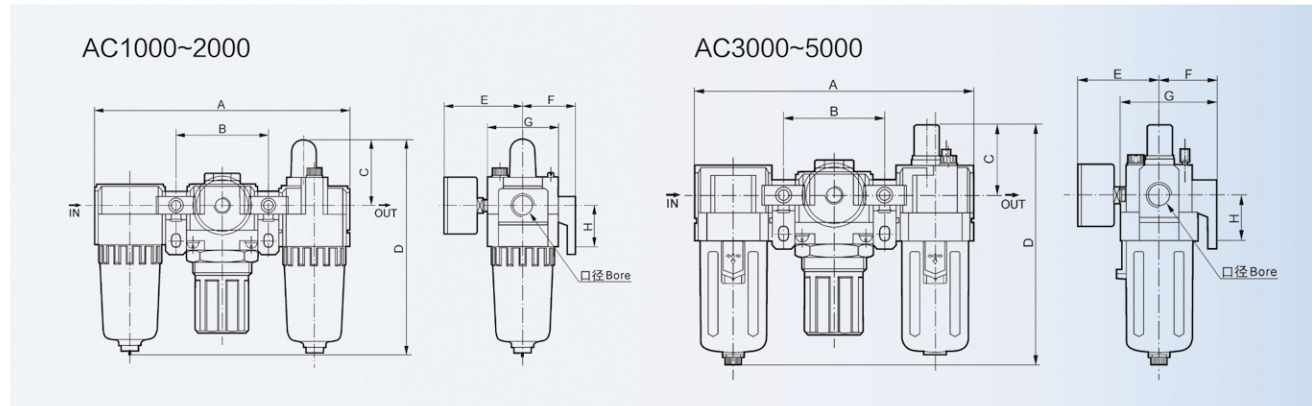


尺寸表 Dimension Sheet

型号 Model	口径 Bore	A	B	C	D	E	F	G	H
AC1000	M5	91	33	25.5	84.5	26	25	25	20
AC2000	G1/8" ~ G1/4"	140	50	38	125	56.8	30	40	24
AC2500	G1/4" ~ G3/8"	181	64	38	156.5	60.8	41	53	35
AC3000	G1/4" ~ G3/8"	181	64	38	156.5	60.8	41	53	35
AC4000	G3/8" ~ G1/2"	238	84	41	191.5	65.5	50	70	40
AC4000-06	G3/4"	253	89	41	193	69.5	50	70	40
AC5000	G3/4" ~ G1"	300	105	48	271.5	75.5	69.8	90	50

AC1010~5010系列空气过滤组合（二联件）

AC1010~5010 Series Air Filter Combination (F.R.L Combination)

外形尺寸 Overall Dimension

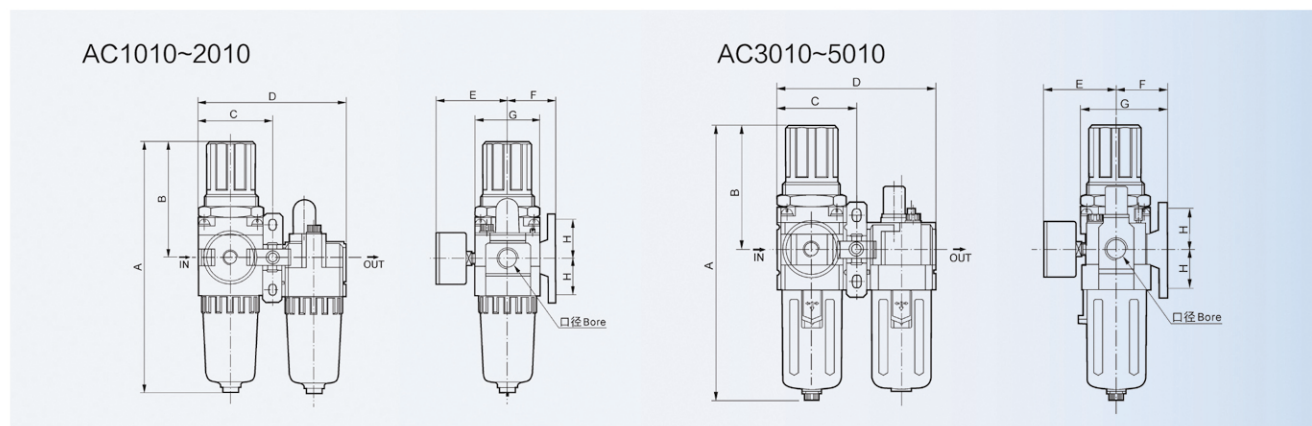


尺寸表 Dimension Sheet

型号 Model	口径 Bore	A	B	C	D	E	F	G	H
AC1010	M5	109.5	50.5	29	58	26	25	25	20
AC2010	G1/8" ~ G1/4"	164	78	45	90	56.8	30	40	24
AC3010	G1/4" ~ G3/8"	211	92.5	58.5	117	60.8	41	53	35
AC4010	G3/8" ~ G1/2"	262	112	77	154	70.5	41	70	40
AC4010-06	G3/4"	267	114	82	164	70.5	50	70	40
AC5010	G3/4" ~ G1"	338	116	97.5	195	75.5	69.8	90	50

PAF1000~5000系列空气过滤器

PAF1000~5000 Series Air Filter




AF1000-M5

AF3000-03

AF5000-10


订购码 Ordering Code

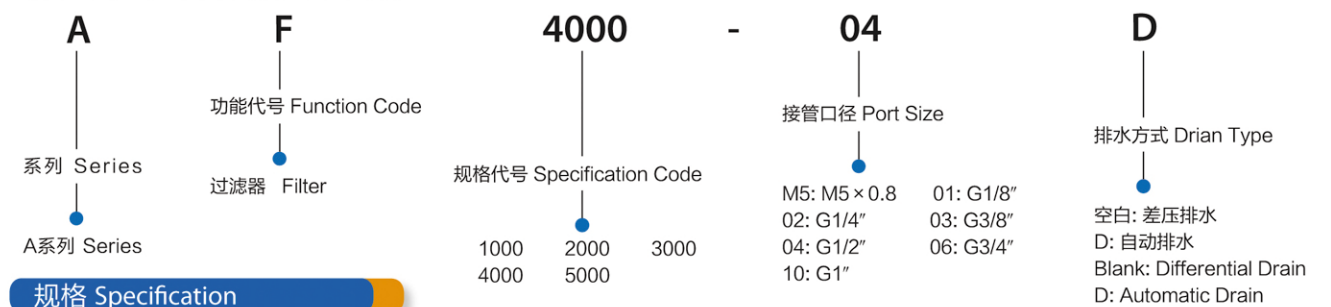


规格 Specification

型号 Model	AF1000-M5	AF2000-01	AF2000-02	AF3000-02	AF3000-03	AF4000-03	AF4000-04	AF4000-06	AF5000-06	AF5000-10
额定流量/Rated Flow	110	750	750	1500	1500	4000	4000	6000	7000	7000
接管口径/Port Size	M5	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
过滤精度/Filter Precision	25 μm									
最高使用压力/Highest Working Pressure	1.0MPa									
保证耐压力/Ensured Pressure Resistance	1.5MPa									
使用温度范围/Operating Temp. Range	5~60℃									
容器材料/Container Material	聚碳酸酯 Polycarbonate									
防护罩/Protective Cover	无 Not Available			有 Available						
放水器功能/Drain Function	差压放水 Differential Drain	差压放水、自动放水 Differential Drain, Automatic Drain								

外形尺寸 Overall Dimension

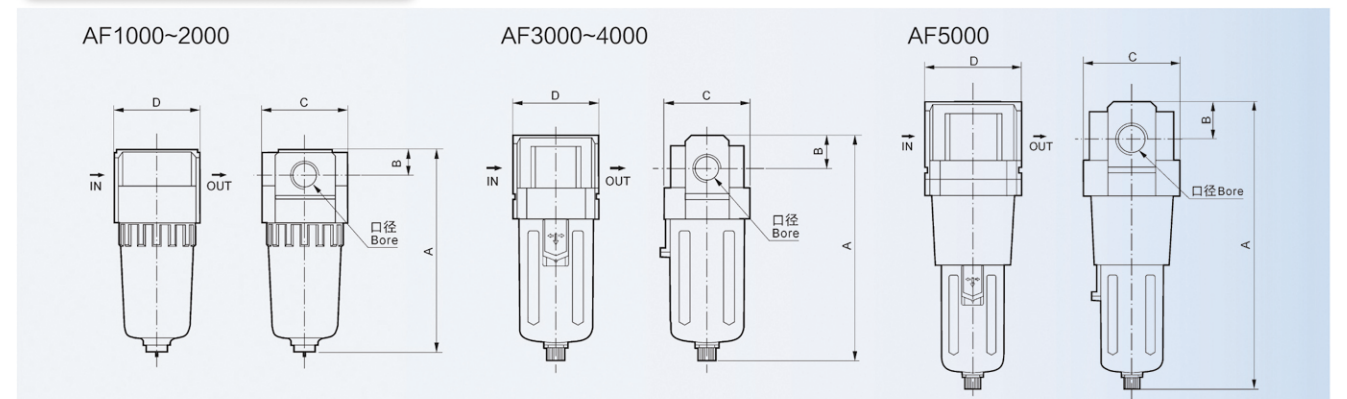

型号 Model	口径 Bore	A	B	C	D
AF1000	M5	66	7	25	-
AF2000	G1/8" ~ G1/4"	97.5	11	40	40
AF3000	G1/4" ~ G3/8"	132.5	14	53	53
AF4000	G3/8" ~ G1/2"	168.5	18	70	70
AF4000-06	G3/4"	172.5	20	70	70
AF5000	G3/4" ~ G1"	247.5	24	90	90


PAR1000~5000系列减压阀
PAR1000~5000 Series Regulator

AR1000-M5

AR3000-03

AR5000-10


订购码 Ordering Code

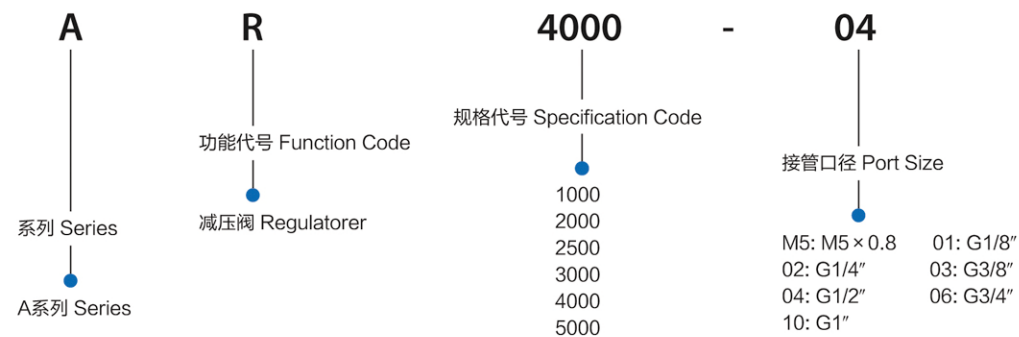

规格 Specification


型号 Model	AR1000-M5	AR2000-01	AR2000-02	AR2500-02	AR2500-03	AR3000-02	AR3000-03	AR4000-03	AR4000-04	AR4000-06	AR5000-06	AR5000-10
额定流量/Rated Flow	100	550	550	2000	2000	2500	2500	6000	6000	6000	8000	8000
接管口径/Port Size	M5	G1/8"	G1/4"	G1/4"	G3/8"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
最高使用压力 Highest Working Pressure	1.0MPa											
保证耐压力 Ensured Pressure Resistance	1.5MPa											
使用温度范围 Operating Temperature Range	5 ~ 60℃											
调节压力范围 Range of Adjustable Pressure	0.05 ~ 0.7MPa	0.05 ~ 0.85MPa										
阀型/Valve Type	带溢流型 With Overflow											

外形尺寸 Overall Dimension

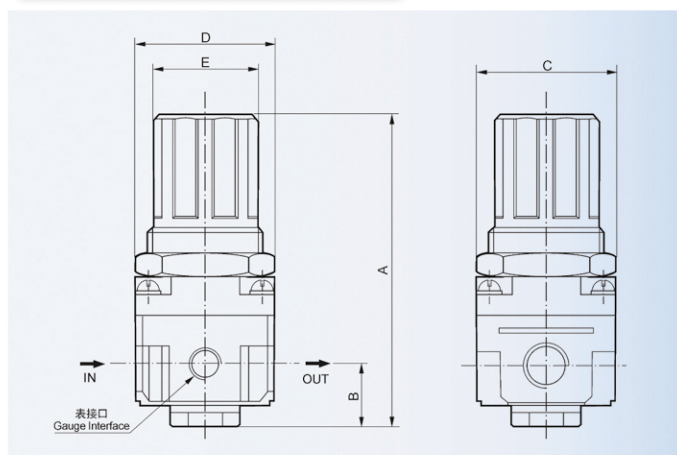

尺寸表 Dimension Sheet

型号 Model	口径 Bore	A	B	C	D	E
AR1000	M5	61.5	11	25	25	28
AR2000	G1/8" ~ G1/4"	95	17	40	40	34
AR2500	G1/4" ~ G3/8"	102.5	25	48	53	34
AR3000	G1/4" ~ G3/8"	127.5	35	53	53	40
AR4000	G3/8" ~ G1/2"	149.5	37.5	70	70	54
AR4000-06	G3/4"	154	40.5	70	75	54
AR5000	G3/4" ~ G1"	168	48	90	90	54


PAW1000~5000系列过滤减压阀
PAW1000~5000 Series Filter & Regulator

AW2000-02

AW4000-04

AW5000-06


订购码 Ordering Code

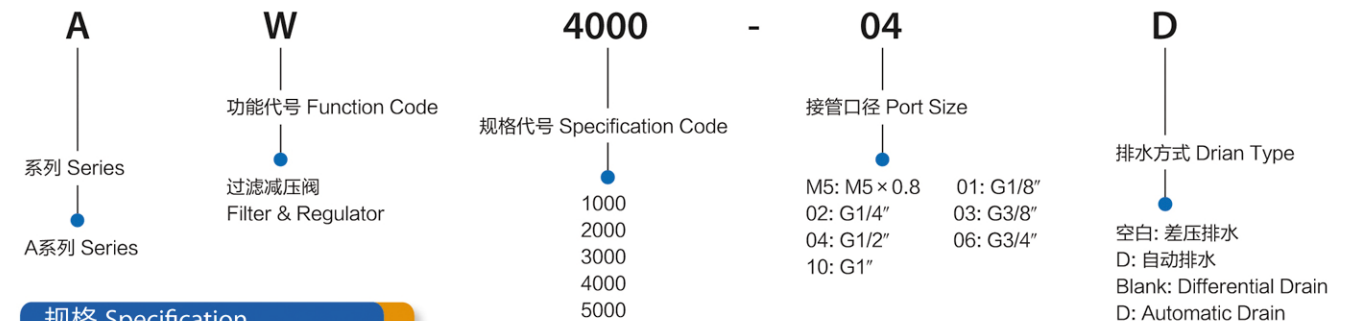

规格 Specification



型号 Model	AW1000 -M5	AW2000 -01	AW2000 -02	AW3000 -02	AW3000 -03	AW4000 -03	AW4000 -04	AW4000 -06	AW5000 -06	AW5000 -10
额定流量/Rated Flow	100	550	550	2000	2000	4000	4000	4500	5500	5500
接管口径/Port Size	M5	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
过滤精度/Filter Precision	25 μm									
最高使用压力/Highest Working Pressure	1.0MPa									
保证耐压力/Ensured Pressure Resistance	1.5MPa									
使用温度范围/Operating Temp. Range	5~60℃									
调节压力范围 Range of Adjustable Pressure	0.05~ 0.7MPa	0.05~0.85MPa								
容器材料/Container Material	聚碳酸酯 Polycarbonate									
防护罩/Protective Cover	无 Not Available			有 Available						
放水器功能/Drain Function	差压放水 Differential Drain	差压放水、自动放水 Differential Drain, Automatic Drain								
阀型/Valve Type	带溢流型 With Overflow									

外形尺寸 Overall Dimension

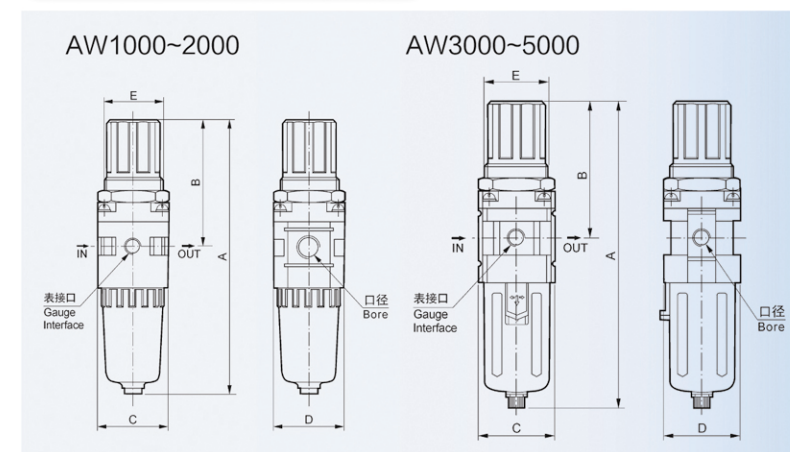


尺寸表 Dimension Sheet


型号 Model	口径 Bore	A	B	C	D	E
AW1000	M5	109.5	50.5	25	28	28
AW2000	G1/8" ~ G1/4"	164.5	78	40	40	34
AW3000	G1/4" ~ G3/8"	211	92.5	53	53	40
AW4000	G3/8" ~ G1/2"	262	112	70	70	54
AW4000-06	G3/4"	267	114	70	70	54
AW5000	G3/4" ~ G1"	338	116	90	90	54

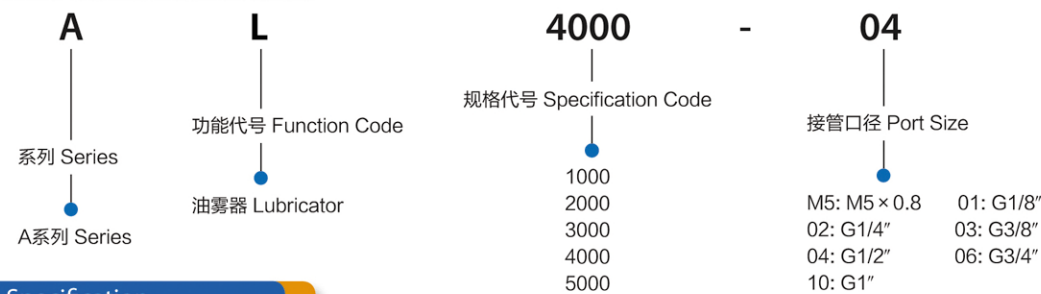PAL1000~5000系列油雾器
PAL1000~5000 Series Lubricator**订购码 Ordering Code****规格 Specification**

型号 Model	AL1000 -M5	AL2000 -01	AL2000 -02	AL3000 -02	AL3000 -03	AL4000 -03	AL4000 -04	AL4000 -06	AL5000 -06	AL5000 -10
额定流量/Rated Flow	95	800	800	1700	1700	5000	5000	5000	7000	7000
接管口径/Port Size	M5	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
最高使用压力/Highest Working Pressure	1.0MPa									
保证耐压力/Ensured Pressure Resistance	1.5MPa									
使用温度范围/Operating Temp. Range	5~60℃									
建议用油/Recommended Oil Use	ISO VG 32									
容器材料/Container Material	聚碳酸酯 Polycarbonate									
防护罩/Protective Cover	无 Not Available					有 Available				

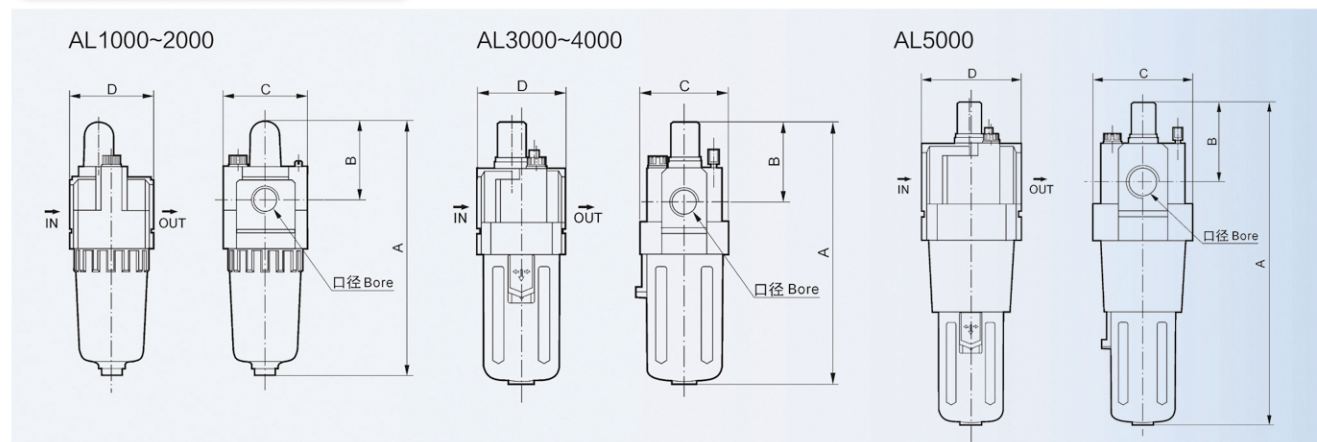外形尺寸 Overall Dimension

型号 Model	口径 Bore	A	B	C	D
AL1000	M5	81.5	25.5	25	-
AL2000	G1/8" ~ G1/4"	122	38	40	40
AL3000	G1/4" ~ G3/8"	142	38	53	53
AL4000	G3/8" ~ G1/2"	177	41	70	70
AL4000-06	G3/4"	177	39	70	70
AL5000	G3/4" ~ G1"	254	45	90	90

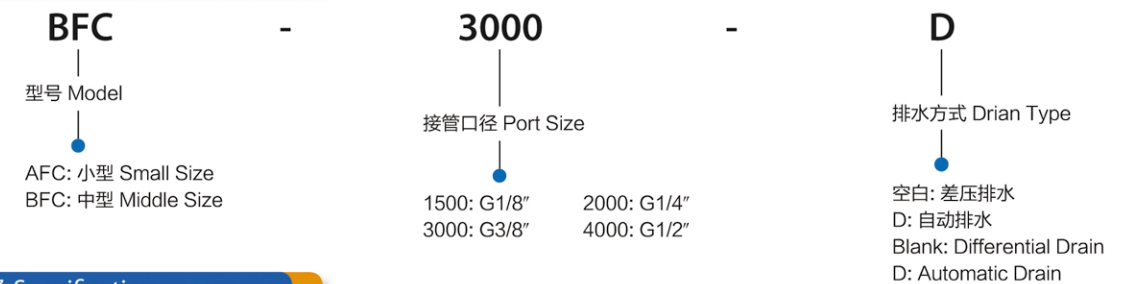AFC、BFC系列二点组合 (二联件)
AFC,BFC Series Two-point Combination (FR.L Combination)**订购码 Ordering Code****规格 Specification**

型号 Model		AFC1500	AFC2000	BFC2000	BFC3000	BFC4000
使用流体/Operating Fluid		空气 Air				
接管口径/Port Size		G1/8"	G1/4"	G1/4"	G3/8"	G1/2"
滤芯粗度/Filtering Element Roughness		40 μ				
调节压力范围/Range of Adjustable Pressure		0.05~0.85MPa				
最大可调压力/Max. Adjustable Pressure		0.95MPa				
保证耐压力/Ensured Pressure Resistance		1.5MPa				
使用温度范围/Operating Temp. Range		5~60℃				
滤水杯容量/Capacity of Filter Cup		15 cc		60 cc		
给油杯容量/Capacity of Oil Feed Cup		25 cc		90 cc		
建议润滑油/Suggested Lube		ISO VG 32 或 同级用油 ISO VG 32 or Same Grade Oil				
重量/Weight		0.5 KG		0.7 KG		
材质 Material	本体/Body	铝合金压铸成型 Aluminum Die-casting Forming				
	容杯/Container Cup	PE				
	保护杯罩/Protective Cup Cover	—		铁 Iron		
构成元件 Composing Elements	过滤调压阀/Filter & Regulator	AFR1500	AFR2000	BFR2000	BFR3000	BFR4000
	油雾器/Lubricator	AL1500	AL2000	BL2000	BL3000	BL4000

外形尺寸 Overall Dimension