

Instruction for use:





Step 2: Connect 12M carbon pool to the wall crawler.



Step 3: check that the connections are properly connected.



Step 4: open ring to insert 12M carbon pool.



Step 5: Make sure the ring is tightened firmly.




Step 6: Check that all connections are correct.



Step 7: Open the clips of the carbon pole to adjust the size of the pole.



Step 8: connect the high pressure hose to the high pressure machine.

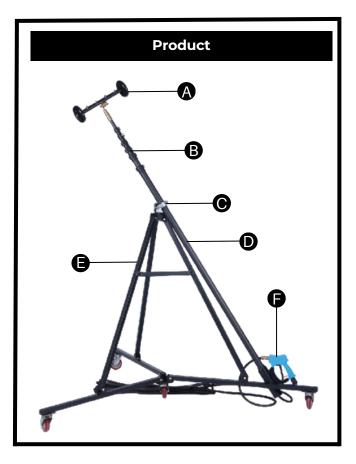

General description

- A. Wall Crawler.
- B. Adjustable Pole.
- C. Clamp.
- D. Carbon Pole 12M.
- E. Tripod
- F. Pressure trigger gun

Important

- Ensure the work area is free of obstacles and that there is enough space to extend the pole safely.
- Inspect the pole, tripod and wall crawler before use.
- Wear appropriate personal protective equipment, to prevent injuries.
- Securly set up the tripod on a flat surface to ensure all parts are properly fastened.
- Use the appropriate water pressure or cleaning agent depending on the level of contamination and the surface type and move the pole in a controlled manner to avoid unnecessary strain on the Wall Crawler and the pole itself.
- Rinse the pole, tripod, and Wall Crawler thoroughly with clean water after use to remove salt, dirt, and chemical residues.
- Regularly check hinges, joints, and moving parts for wear and lubricate them if necessary.
- Store the components in a dry and safe place to remain the device in optimal condition.