

TETRA Forged screw pin shackles (galvanized)

Straight shackle / D-shackle



Bow shackle / Harp-shackle




Approvals: EN 13889 / ISO 12100 / CE

Temperature range: -20 °C upto +150 °C
UV resistant

Safety factor: 6:1

All shackles are forged and sized according to industry standard.
High quality screw pin for easy attachment and safe working conditions.

Material: 20Cr Steel

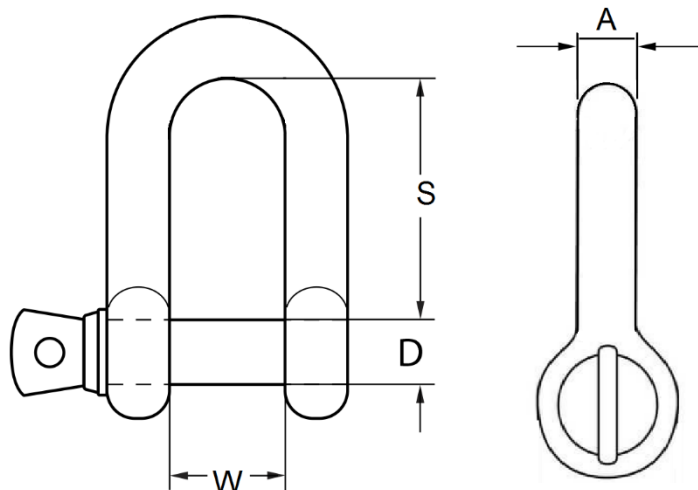

Straight shackle / D-shackle

Code	Product	Type	WLL	D (mm)	S (mm)	A (mm)	W (mm)	O (mm)
12536	TETRA TSS-005	Straight shackle	0.5T	8,0	22,0	6,5	12,0	x
12537	TETRA TSS-010	Straight shackle	1T	12,0	32,0	9,5	17,0	x
12538	TETRA TSS-020	Straight shackle	2T	16,0	41,5	13,0	20,5	x
12539	TETRA TSS-032	Straight shackle	3.25T	20,0	51,0	16,0	27,0	x
12540	TETRA TSS-047	Straight shackle	4.75T	22,0	60,5	19,0	32,0	x
12541	TETRA TSS-085	Straight shackle	8.5T	30,0	81,0	25,5	43,0	x
12542	TETRA TSS-095	Straight shackle	9.5T	33,0	91,0	29,0	46,0	x
12543	TETRA TSS-120	Straight shackle	12T	36,0	100,0	32,0	51,5	x
12544	TETRA TSS-250	Straight shackle	25T	52,0	146,0	44,5	73,0	x
12545	TETRA TBS-005	Bow shackle	0.5T	8,0	29,0	6,5	12,0	20,0
12546	TETRA TBS-010	Bow shackle	1T	12,0	36,5	9,5	17,0	26,0
12547	TETRA TBS-020	Bow shackle	2T	16,0	48,0	13,0	20,5	33,0
12548	TETRA TBS-032	Bow shackle	3.25T	20,0	60,5	16,0	27,0	43,0
12549	TETRA TBS-047	Bow shackle	4.75T	22,0	71,5	19,0	32,0	102,5
12550	TETRA TBS-085	Bow shackle	8.5T	30,0	95,0	25,5	43,0	68,5
12551	TETRA TBS-095	Bow shackle	9.5T	33,0	108,0	29,5	46,0	74,0
12552	TETRA TBS-120	Bow shackle	12T	36,0	119,0	33,0	51,5	82,5
12553	TETRA TBS-250	Bow shackle	25T	52,0	178,0	47,0	73,0	127,0

Bow shackle / Harp-shackle

