

TETRA Polyester webbing sling



Material: 100% polyester

Safety factor: 7:1

Approvals: NEN-EN 1492-1 / NEN-EN 1492-2 / CE

Temperature range: -40 °C tot +100 °C
UV resistant

All TETRA slings are color coded in accordance with the European color coding.

Offering a unique range of slings with a WLL up to 50 tons available from stock.

All slings are individually packed in a plastic cover and are supplied with the test certificate.


The following types are available:

Belt type


Endless type

Round sling



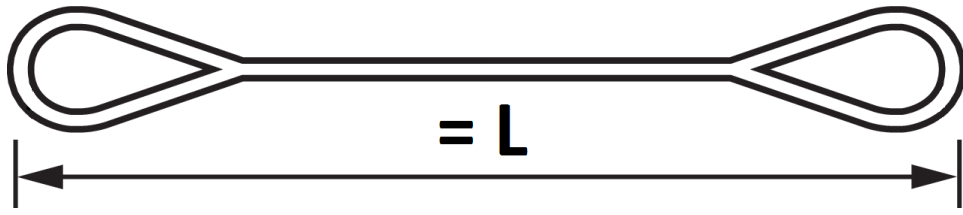

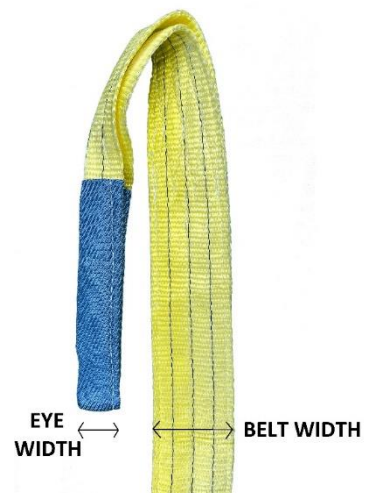




BELT TYPE



BELT TYPE												
Code	Product	WLL (Work load limit)	BL (Break load)	Length	Width	Color	Weight	Eye-width	Packed dimensions			
									Length	Width	Height	
12067	TETRA WSB-1T1M	1 ton	7 ton	1 m	30 mm	Purple	0,3 kg	30 mm	34 cm	5 cm	3 cm	
12068	TETRA WSB-1T2M	1 ton	7 ton	2 m	30 mm	Purple	0,4 kg	30 mm	41 cm	6 cm	4 cm	
12069	TETRA WSB-1T3M	1 ton	7 ton	3 m	30 mm	Purple	0,6 kg	30 mm	43 cm	7 cm	4 cm	
12568	TETRA WSB-1T4M	1 ton	7 ton	4 m	30 mm	Purple	0,9 kg	30 mm	45 cm	8 cm	3 cm	
12070	TETRA WSB-1T6M	1 ton	7 ton	6 m	30 mm	Purple	1,1 kg	30 mm	48 cm	10 cm	4 cm	
12569	TETRA WSB-2T1M	2 ton	14 ton	1 m	60 mm	Green	0,5 kg	35 mm	44 cm	6 cm	4 cm	
12570	TETRA WSB-2T2M	2 ton	14 ton	2 m	60 mm	Green	0,8 kg	35 mm	51 cm	6 cm	5 cm	
12071	TETRA WSB-2T3M	2 ton	14 ton	3 m	60 mm	Green	1,2 kg	35 mm	52 cm	7 cm	6 cm	
12571	TETRA WSB-2T4M	2 ton	14 ton	4 m	60 mm	Green	1,5 kg	35 mm	53 cm	8 cm	6 cm	
12572	TETRA WSB-2T6M	2 ton	14 ton	6 m	60 mm	Green	2,2 kg	35 mm	53 cm	12 cm	6 cm	
12377	TETRA WSB-2T10M	2 ton	14 ton	10 m	60 mm	Green	3,5 kg	35 mm	53 cm	16 cm	6 cm	
12072	TETRA WSB-3T1M	3 ton	21 ton	1 m	90 mm	Yellow	0,7 kg	50 mm	35 cm	9 cm	4 cm	
12573	TETRA WSB-3T2M	3 ton	21 ton	2 m	90 mm	Yellow	1,2 kg	50 mm	52 cm	10 cm	7 cm	
12073	TETRA WSB-3T3M	3 ton	21 ton	3 m	90 mm	Yellow	2 kg	50 mm	52 cm	10 cm	9 cm	
12074	TETRA WSB-3T6M	3 ton	21 ton	6 m	90 mm	Yellow	3 kg	50 mm	52 cm	10 cm	11 cm	
12574	TETRA WSB-3T10M	3 ton	21 ton	10 m	90 mm	Yellow	5 kg	50 mm	52 cm	15 cm	9 cm	
12575	TETRA WSB-4T1M	4 ton	28 ton	1 m	120 mm	Grey	0,9 kg	65 mm	45 cm	12 cm	6 cm	
12075	TETRA WSB-4T3M	4 ton	28 ton	3 m	120 mm	Grey	2 kg	65 mm	52 cm	13 cm	6 cm	
12576	TETRA WSB-4T6M	4 ton	28 ton	6 m	120 mm	Grey	4,2 kg	65 mm	52 cm	13 cm	10 cm	
12076	TETRA WSB-5T1M	5 ton	35 ton	1 m	150 mm	Red	1,4 kg	80 mm	36 cm	16 cm	6 cm	
12077	TETRA WSB-5T3M	5 ton	35 ton	3 m	150 mm	Red	3 kg	80 mm	54 cm	16 cm	6 cm	
12078	TETRA WSB-5T6M	5 ton	35 ton	6 m	150 mm	Red	6 kg	80 mm	51 cm	16 cm	13 cm	
12577	TETRA WSB-5T10M	5 ton	35 ton	10 m	150 mm	Red	9 kg	80 mm	52 cm	16 cm	15 cm	
12578	TETRA WSB-8T2M	8 ton	56 ton	2 m	250 mm	Blue	3,6 kg	120 mm	53 cm	25 cm	5 cm	
12579	TETRA WSB-8T6M	8 ton	56 ton	6 m	250 mm	Blue	9 kg	120 mm	55 cm	25 cm	12 cm	
12079	TETRA WSB-10T3M	10 ton	70 ton	3 m	300 mm	Orange	6 kg	150 mm	53 cm	30 cm	9 cm	
12080	TETRA WSB-10T6M	10 ton	70 ton	6 m	300 mm	Orange	12 kg	150 mm	50 cm	30 cm	10 cm	
12081	TETRA WSB-10T10M	10 ton	70 ton	10 m	300 mm	Orange	18 kg	150 mm	52 cm	29 cm	24 cm	
12082	TETRA WSB-24T5M	24 ton	168 ton	5 m	300 mm	Orange	23 kg	160 mm	60 cm	30 cm	30 cm	
12083	TETRA WSB-24T10M	24 ton	168 ton	10 m	300 mm	Orange	43 kg	160 mm	65 cm	30 cm	45 cm	






		WLL FACTOR FOR BELT TYPE SLING									
		1 SLING					2 SLINGS				
											
		Straight	Choke	0° - 7°	7° - 45°	45° - 60°	Straight upto 45°	Choke upto 45°	Straight 45° - 60°	Choke 45° - 60°	
		WLL	x 1	x 0.8	x 2	x 1.4	x 1	x 1.4	x 1.12	x 1	x 0.8
Purple	1 ton	1,0	0,8	2,0	1,4	1,0	1,4	1,1	1,0	0,8	
Green	2 ton	2,0	1,6	4,0	2,8	2,0	2,8	2,2	2,0	1,6	
Yellow	3 ton	3,0	2,4	6,0	4,2	3,0	4,2	3,4	3,0	2,4	
Grey	4 ton	4,0	3,2	8,0	5,6	4,0	5,6	4,5	4,0	3,2	
Red	5 ton	5,0	4,0	10,0	7,0	5,0	7,0	5,6	5,0	4,0	
Blue	8 ton	8,0	6,4	16,0	11,2	8,0	11,2	9,0	8,0	6,4	
Orange	10 ton	10,0	8,0	20,0	14,0	10,0	14,0	11,2	10,0	8,0	
Orange	24 ton	24,0	19,2	48,0	33,6	24,0	33,6	26,9	24,0	19,2	





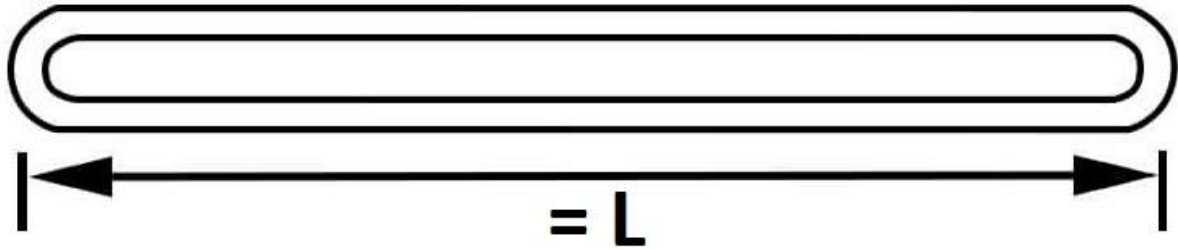








ENDLESS TYPE




ENDLESS TYPE										
Code	Product	WLL (Work load limit)	BL (Break load)	Length	Width	Color	Weight	Packed dimensions		
								Length	Width	Height
12084	TETRA WSE-1T1M	1 ton	7 ton	1 m	30 mm	Purple	0,2 kg	34 cm	4 cm	3 cm
12085	TETRA WSE-1T3M	1 ton	7 ton	3 m	30 mm	Purple	0,5 kg	43 cm	6 cm	4 cm
12086	TETRA WSE-1T6M	1 ton	7 ton	6 m	30 mm	Purple	1 kg	47 cm	10 cm	4 cm
12087	TETRA WSE-2T1M	2 ton	14 ton	1 m	60 mm	Green	0,4 kg	34 cm	6 cm	3 cm
12088	TETRA WSE-2T2M	2 ton	14 ton	2 m	60 mm	Green	0,7 kg	41 cm	7 cm	5 cm
12089	TETRA WSE-2T3M	2 ton	14 ton	3 m	60 mm	Green	1 kg	43 cm	7 cm	6 cm
12090	TETRA WSE-3T1M	3 ton	21 ton	1 m	90 mm	Yellow	0,6 kg	34 cm	9 cm	4 cm
12091	TETRA WSE-3T2M	3 ton	21 ton	2 m	90 mm	Yellow	1,2 kg	41 cm	10 cm	5 cm
12092	TETRA WSE-3T3M	3 ton	21 ton	3 m	90 mm	Yellow	1,5 kg	43 cm	9 cm	5 cm
12093	TETRA WSE-3T6M	3 ton	21 ton	6 m	90 mm	Yellow	3 kg	48 cm	9 cm	8 cm
12094	TETRA WSE-4T3M	4 ton	28 ton	3 m	120 mm	Grey	2 kg	45 cm	13 cm	6 cm
12095	TETRA WSE-5T1M	5 ton	35 ton	1 m	150 mm	Red	1 kg	36 cm	17 cm	3 cm
12096	TETRA WSE-5T3M	5 ton	35 ton	3 m	150 mm	Red	3 kg	44 cm	16 cm	6 cm
12097	TETRA WSE-5T6M	5 ton	35 ton	6 m	150 mm	Red	6 kg	51 cm	10 cm	15 cm
12098	TETRA WSE-8T2M	8 ton	56 ton	2 m	240 mm	Blue	3 kg	52 cm	25 cm	4 cm
12099	TETRA WSE-8T4M	8 ton	56 ton	4 m	240 mm	Blue	6 kg	51 cm	25 cm	6 cm
12100	TETRA WSE-8T6M	8 ton	56 ton	6 m	240 mm	Blue	9 kg	47 cm	25 cm	10 cm
12101	TETRA WSE-8T8M	8 ton	56 ton	8 m	240 mm	Blue	11 kg	52 cm	26 cm	13 cm
12102	TETRA WSE-8T10M	8 ton	56 ton	10 m	240 mm	Blue	14 kg	56 cm	26 cm	15 cm
12103	TETRA WSE-10T3M	10 ton	70 ton	3 m	300 mm	Orange	6 kg	52 cm	31 cm	5 cm
12104	TETRA WSE-10T6M	10 ton	70 ton	6 m	300 mm	Orange	11 kg	50 cm	33 cm	10 cm
12105	TETRA WSE-10T10M	10 ton	70 ton	10 m	300 mm	Orange	18 kg	54 cm	32 cm	14 cm
12106	TETRA WSE-24T5M	24 ton	168 ton	5 m	300 mm	Orange	22 kg	70 cm	35 cm	15 cm
12107	TETRA WSE-24T10M	24 ton	168 ton	10 m	300 mm	Orange	43 kg	72 cm	35 cm	20 cm






WLL FACTOR FOR ENDLESS- / ROUND SLING												
	1 SLING							2 SLINGS				
												
WLL	x 1	x 0.8	x 2	x 1.4	x 1	x 0.7	x 0.5	x 1.4	x 1.12	x 1	x 0.8	
Purple	1 ton	1,0	0,8	2,0	1,4	1,0	0,7	0,5	1,4	1,1	1,0	0,8
Green	2 ton	2,0	1,6	4,0	2,8	2,0	1,4	1,0	2,8	2,2	2,0	1,6
Yellow	3 ton	3,0	2,4	6,0	4,2	3,0	2,1	1,5	4,2	3,4	3,0	2,4
Grey	4 ton	4,0	3,2	8,0	5,6	4,0	2,8	2,0	5,6	4,5	4,0	3,2
Red	5 ton	5,0	4,0	10,0	7,0	5,0	3,5	2,5	7,0	5,6	5,0	4,0
Blue	8 ton	8,0	6,4	16,0	11,2	8,0	5,6	4,0	11,2	9,0	8,0	6,4
Orange	10 ton	10,0	8,0	20,0	14,0	10,0	7,0	5,0	14,0	11,2	10,0	8,0
Orange	24 ton	24,0	19,2	48,0	33,6	24,0	16,8	12,0	33,6	26,9	24,0	19,2
Orange	25 ton	25,0	20,0	50,0	35,0	25,0	17,5	12,5	35,0	28,0	25,0	20,0
Orange	50 ton	50,0	40,0	100,0	70,0	50,0	35,0	25,0	70,0	56,0	50,0	40,0

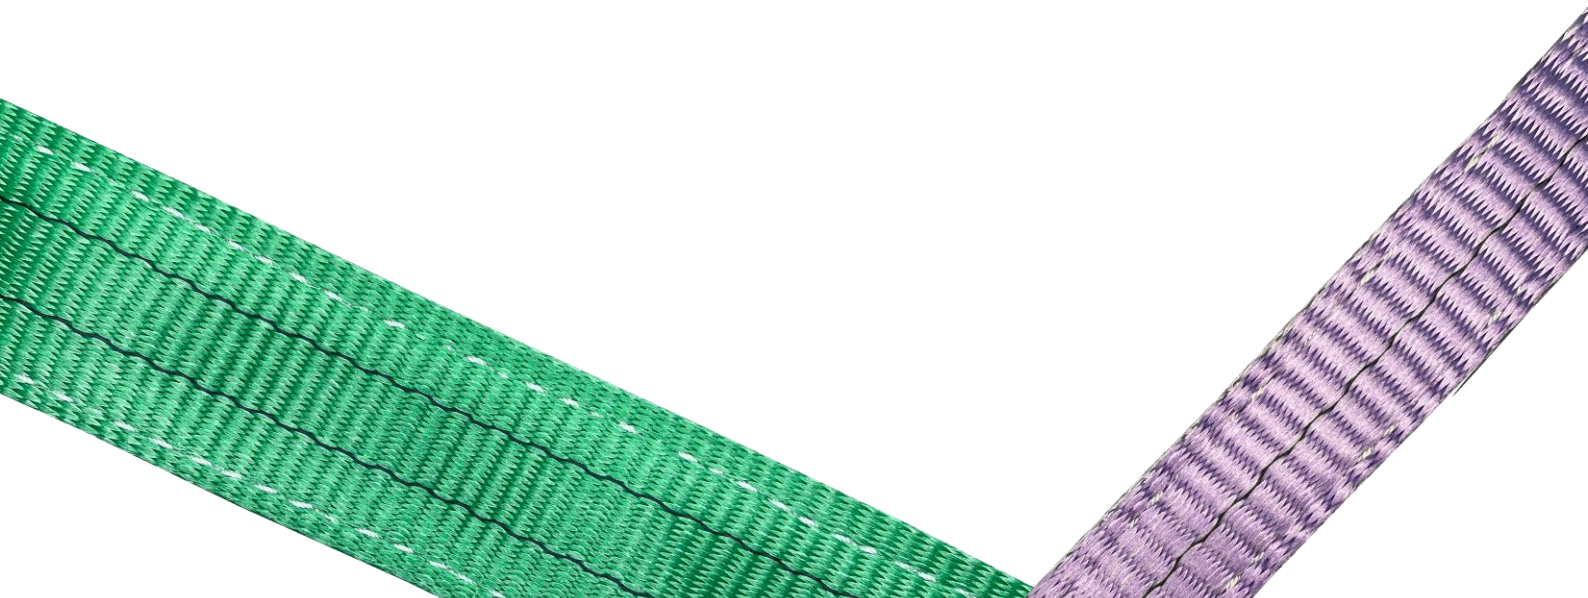

ROUND SLING

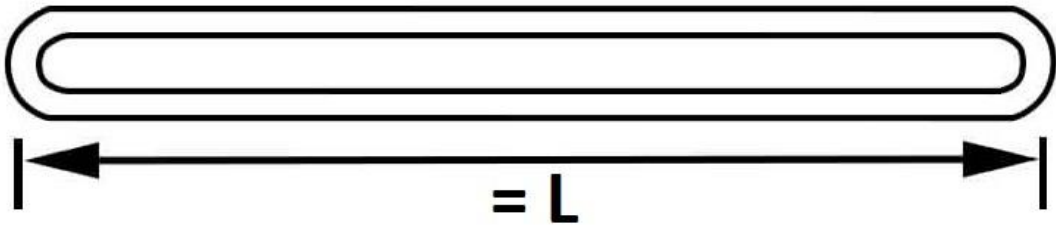

ROUND SLING										
Code	Product	WLL (Work load limit)	BL (Break load)	Length	Width	Color	Weight	Packed dimensions		
								Length	Width	Height
12108	TETRA RS-1T3M	1 ton	7 ton	3 m	45 mm	Purple	0,9 kg	29 cm	11 cm	5 cm
12109	TETRA RS-2T3M	2 ton	14 ton	3 m	50 mm	Green	1,4 kg	52 cm	12 cm	5 cm
12110	TETRA RS-3T3M	3 ton	21 ton	3 m	60 mm	Yellow	2 kg	52 cm	13 cm	5 cm
12111	TETRA RS-4T3M	4 ton	28 ton	3 m	70 mm	Grey	3 kg	52 cm	15 cm	7 cm
12112	TETRA RS-5T3M	5 ton	35 ton	3 m	75 mm	Red	3 kg	51 cm	18 cm	7 cm
12113	TETRA RS-10T3M	10 ton	70 ton	3 m	90 mm	Orange	5 kg	52 cm	21 cm	8 cm
12114	TETRA RS-25T3M	25 ton	175 ton	3 m	150 mm	Orange	18 kg	53 cm	34 cm	21 cm
12115	TETRA RS-50T3M	50 ton	350 ton	3 m	170 mm	Orange	40 kg	105 cm	35 cm	25 cm
12116	TETRA RS-50T6M	50 ton	350 ton	6 m	170 mm	Orange	74 kg	110 cm	60 cm	35 cm



